




Hook & Loop

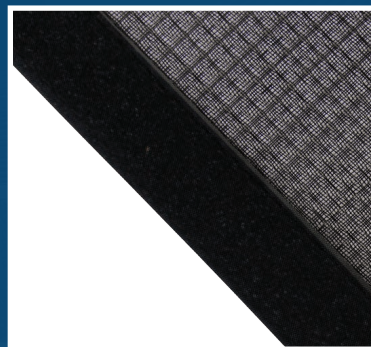

PreVent® HOOK & LOOP MOUNTING

PreVent® Equipment Protection Filters are available with a hook/loop mounting option for applications where metal framing or grommet attachment is not an option. The loop side is sewn onto the vinyl edge of the filter. The hook side with adhesive backing will be installed on the equipment housing. Initial installation should be done at temperatures of 50° or higher.

SURFACE PREPARATION

The hook side must be installed on a clean surface. Clean the equipment surface using an alcohol based liquid to remove any existing grease or grime.

- Remove the protective tape backing from the hook strip.
- Press firmly while applying the hook stripping to the equipment housing. Even distribution of the adhesive is required for a firm long-term hold.
- Run a hard plastic spatula or rubber seam roller over the hook stripping with firm pressure to ensure all air bubbles have been removed.

High performance hook attachment with adhesive is available for outdoor installations.

