
PERMAFLO® RIGID POLYESTER



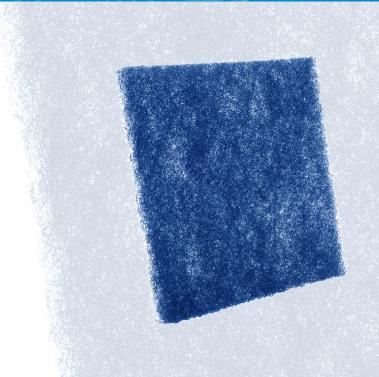

MODELS

PFLO2025-1

PFLO2025-8PK

PFLO1/2-ROLL25

PFLO1/2-ROLL48

PFLO1-ROLL25

PFLO1-ROLL30

PFLO1-ROLL36

PFLO1-ROLL48



FEATURES

A unique alternative to hogs hair. Available in 15"x24" or 20"x25" precut pads or rolls. Rigid construction needs no frame. Cleans easily with water, fibers unaffected by moisture. Safe to handle, no fiberglass, sharp edges, flaking or shedding. Bi-directional air flow. Can be easily cut-to-fit with scissors.

PRODUCT DETAILS

- Blue self-supporting rigid polyester fiber with proprietary binder
- · UL Classified as to Flammability Only
- Self Extinguishing -- FMVSS 302 Certified
- Available in 1/2" or 1" nominal thickness
- Product Weight: 1/2": 22.5 +/- 2.0 ounces per Square Yard; 1": 24.3 +/- 2.0
- Maximum operating temperature 200°F (use at 200°F can cause softening, prolonged use can cause media to become brittle)
- Initial air flow resistance 1/2" 0.03 in. w.g.@1200 cfm; 1": 0.07 in. w.g.@1200 cfm
- Arrestance efficiency 1/2": 70%; 1": 80%
- Dust Holding Capacity 1/2": 316 grams; 1": 343 grams
- 1/2" = MERV 5
- 1" = MERV 6

